


AirRise Wall Charger

Data Sheet



Dimensions

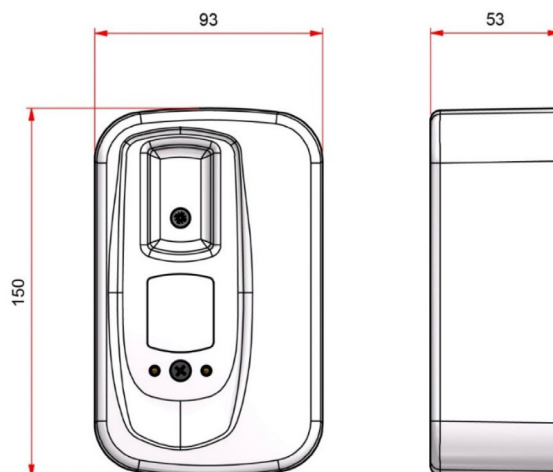

Specification

Installation	Wall or power outlet
Operation (input)	Charging of the batteries of a PLS Ceiling Hoist when Hand Control is placed on the Wall Charger.
Operation notification	Green LED on the Hand Control
Power Supply Unit (PSU) (Wall Charger 5264)	Mascot 2240B (internal mascot)
Power Supply Unit (PSU) (Wall Charger 5265)	Mascot 2240 (external mascot)
Compliance Mascot 2240(B)	Medically certified
Input Voltage	90-264 V/AC
Maximal Output Voltage	+29,4 V/DC
Maximal Output Current	0,5 A
Stand-by voltage	+27,4 V/DC
Frequency	50-60 Hz
Protection	Reversed polarity and short circuit
Temperature range (operating)	-10 °C - +40 °C
Temperature range (storage)	-25 °C - +85 °C
Switch-off time when not in use	NA
Weight (Wall Charger 5264)	0,39 Kg 0,86 lb
Weight (Wall Charger 5265, exclusive Mascot)	0,32 Kg 0,70 lb
Sound level (operation)	NA
IP-rating (when installed)	IP-52
Material Housing	ABS with the Safety of Flammability UL 94 V-0
Colour	RAL 7035
Compliance POGO pins	RoHS & HF
Durability POGO pins (minimum)	+10000 cycles
Material POGO pins	Brass
Plating POGO pins	Gold 10 micro-inch over 50~120 micro-inch nickel
IP-rating POGO pins (waterproof)	IP-x5
Dimensions (mm)	See diagram above